




NÚMERO DE CAIXAS (Un)	Ran	01.01	01.02	01.03	01.04	01.05	01.06	01.07	01.08	01.09	Ex04
COTA DE TERRENO (m)	398.66	399.05	399.40	398.90	398.40	398.60	399.00	398.90	398.50	397.60	397.36
COTA DE SOLEIRA (m)	397.56	397.52	397.40	397.29	397.18	397.07	397.00	396.85	396.67	396.59	396.56
DIST. ENTRE PERFIS (m)	8.88	21.13	19.44	20.14	20.81	12.60	27.05	32.54	14.00	5.64	
DIST. À ORIGEM (m)	0.00	8.88	28.35	46.51	66.65	87.46	100.06	127.11	159.65	173.65	179.29
INCLINAÇÃO (%)		0.6%	0.6%	0.5%	0.5%	0.6%	0.6%	0.6%	0.5%	0.7%	
MATERIAL/DIÂMETRO (Ømm)		PVCØ200mm SN4									

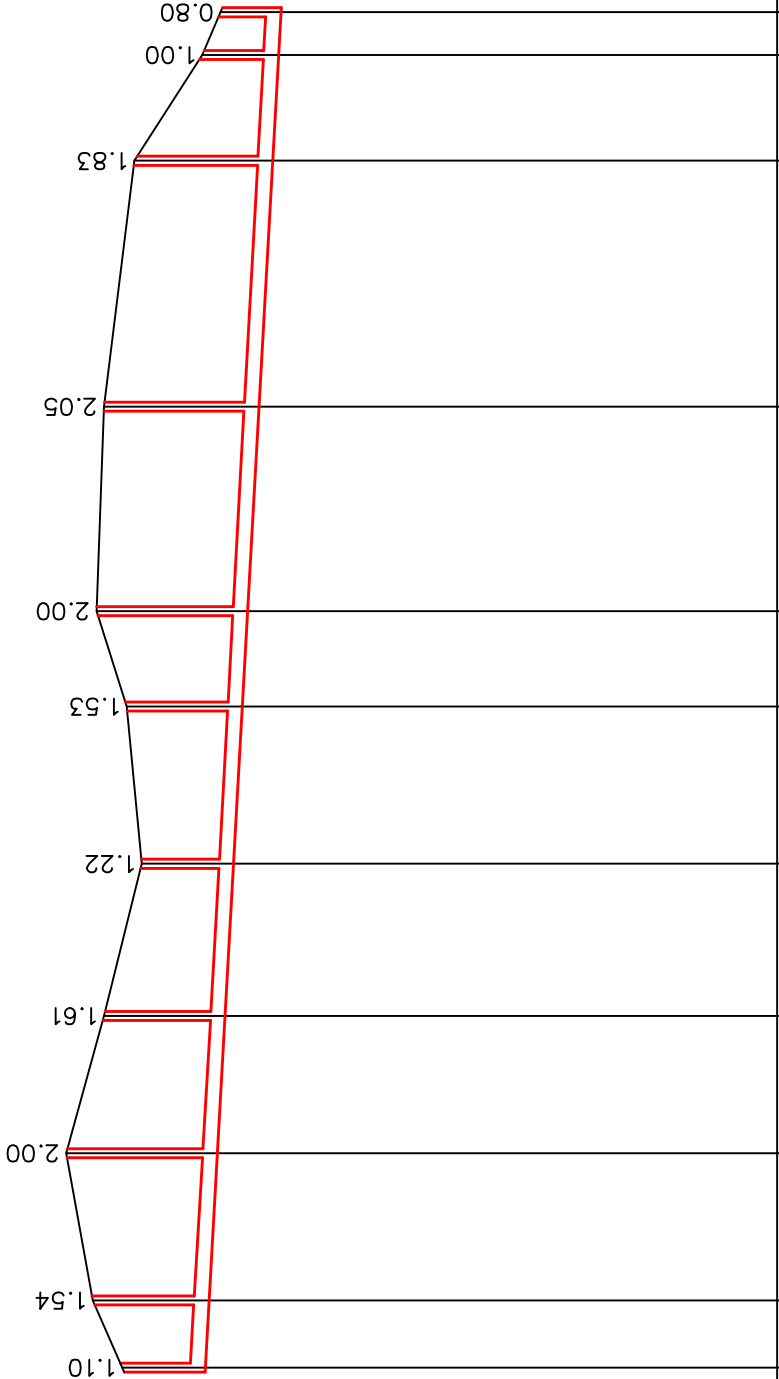

SERVIÇOS MUNICIPALIZADOS
DE ÁGUA E SANEAMENTO
DE VISEU

LIGAÇÃO DA REDE DE ESGOTO DA RUA DO FORNO À EEAR DE TEIVAS

PROJETO Nº : 03-2021

PROJ:

TOP:

CAD 23-2021-Ligacao_esgoto_rua_forno_eear_teivas

DES:

DATA: 01/2021

OBS:

ESCALA (S):

H= 1/1000
V= 1/100

02.02

O ENG. DIRECTOR-DELEGADO